CYCLOPS Spot Light

Outdoor SERIES





PRODUCT OVERVIEW

THE ALTSA SPOT LIGHT is a very versatile and affordable Spot Light, designed for multiple luminaire Solutions. Giving planners the maximum scope for design. to provide and create impressive shemes that are ideal for different types of enviroments using self-configured Luminaire forms. The Spot light offers A Modern design that is suitable for indoor and outdoor installations.these spot lights can be installed in a variety of different installation Methods.

Quality comes standard.

Quality comes standard					
50000 J Hours LIFESPAN	IP67 OUTDOOR	Low MAINTENANCE	Year WARRANTY	Product CERTIFICATION	
APPLICATIONS CONSTRUCTION DETAILS				AILS	
Sign Lighting		High Pressure Die-Cast Aluminium			
Commercial Areas		Adjustable Joint Head			
Bridges/Pathways/Roads		IP67 Ingre	IP67 Ingress Protection		
FEATURES					
Water, Dust, Damp & Pressure Proof		UGR 22 Gl	UGR 22 Glare Rate		
High Luminous Efficiency (100lm/W)		CRI: >80	CRI: >80		
Excellent heat dissipation		Input Volta	Input Voltage: 100-277VAC		
Easy Installation		Power Fac	Power Factor: >0.95		
Warranty: 5 Years	Various Be	Various Beam Angles			




TECHNICAL DATA

Operating Voltage	100-277VAC	CRI:	80 / 90 (Optional)
Power (Normal)	20, 35, 40, 60, 70, 150W	Colour Temp.	2700
Operating Temp.	-20°C ~ 50°C		3000
Surge Protection	5kV		4000
Glare Index	UGR22 (Standard)		5000
	UGR19 (Optional)	Warranty	5-Year
Colour	Bronze or Special finished	Luminaire Efficacy	100lm/W
Materials	High Pressure die cast aluminium		
MacAdams Value	XXX		
Beam Angle	XXX	Lifespan	50 000hrs
Flicker Specification	XXX		
Driver Type	CE	Electrical Class	Class I
	Tridonic		
	Vossloh Schwabe		











Linear Diffuser

MOUNTING DATA



Ground Stake

Junction Box

Pole Mount

Wall Mount

TM Tree Mount









Design Specifications Unilateral (2 Fold/3 Fold/ 4 Fold) Bilateral (2 Fold/4 Fold/ 6 Fold)






Design Specifications (Candelabra) 1 Fold 2 Fold 120° & 180° 3 Fold 360° Suitable for 60mm , 76mm Pole



Sistema Design

Arrangement of luminaire heads around the poles Axis Between 0 - 360° one or Various Staggered Levels. Suitable for 60mm - 200 mm Poles



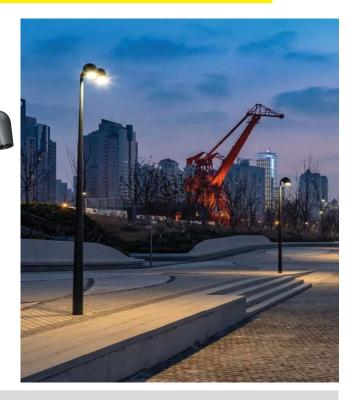





Signage Lighting for advertising

