

INDOOR Wall Light



INDOOR SERIES



PRODUCT OVERVIEW

These high quality, energy-efficient and elegant lights are available for indoors and outdoors, They come in a wide variety of shapes and sizes. With their Unique design these lights can be installed in all types of environments.

They have a long- life span and leaves a lasting impression.

These wall lights can function as an emergency luminaire and comes optional with a built-in battery Backup system. Which is efficient during any Power Failure/outage.

Quality comes standard...



Hours
LIFESPAN



IP42
Indoor



Low
MAINTENANCE



Year
WARRANTY



Product
CERTIFICATION

APPLICATIONS		FEATURES	
Hotels	Universities	Aluminium Frame	High Brightness Cree chip sets
Conference Facilities	Hospitals	Glare Rating: UGR >22	
Factories	Offices	Uniform Light Spread	
Schools / Colleges	Industrial Areas	Flicker Free	
Commercial Space	Warehouses	Laser PMMA Guide Panel	
CONSTRUCTION DETAILS			
Silver/White/Black Housing Finish		Powder Coated With 1mm Thick Steel Base	
IP42 Ingress Protection		PC Cover	

Indoor Wall Light

TECHNICAL DATA | Round

MODEL No.:	SIZE (mm)	VOLTAGE (V)	POWER (W)	LUMEN (lm)	TRIM COLOUR	CRI	CCT (K)
SMLR-W15/*	270øx76	100-277	15	850	White	>80	2700-6500
SMLR-W20/*	350øx76	100-277	20	1150	White	>80	2700-6500
SMLR-S15/*	270øx76	100-277	15	850	Silver	>80	2700-6500
SMLR-S20/*	350øx76	100-277	20	1150	Silver	>80	2700-6500

* Colour Temperature: 2000-3000K (02) / 4000K (04) / 6000K (06)



TECHNICAL DATA | Square

MODEL No.:	SIZE (mm)	VOLTAGE (V)	POWER (W)	LUMEN (lm)	TRIM COLOUR	CRI	CCT (K)
SMLS-W15/*	270x270x76	100-277	15	850	White	>80	2700-6500
SMLS-W20/*	350x350x76	100-277	20	1150	White	>80	2700-6500
SMLS-S15/*	270x270x76	100-277	15	850	Silver	>80	2700-6500
SMLS-S20/*	350x350x76	100-277	20	1150	Silver	>80	2700-6500

* Colour Temperature: 2000-3000K (02) / 4000K (04) / 6000K (06)



TECHNICAL DATA | Slim Line

MODEL No.:	SIZE (mm)	VOLTAGE (V)	POWER (W)	LUMEN (lm)	TRIM COLOUR	CRI	CCT (K)
SMLSL-W9/*	270øx76	100-277	9	650	White	>80	2700-6500
SMLSL-W12/*	270øx76	100-277	12	900	White	>80	2700-6500
SMLSL-W15/*	270øx76	100-277	15	1125	White	>80	2700-6500

* Colour Temperature: 2000-3000K (02) / 4000K (04) / 6000K (06)



TECHNICAL DATA | Wrap Around

MODEL No.:	SIZE (mm)	POWER (W)	LUMEN (lm)	PACKAGING (cm)
UP-AL08-8-12W	ø200x48	12	1020-1120	50x50x30 / 20PCS 30kg
UP-AL08-12-18W	ø300x40	18	1530-1620	55x34x35 / 10PCS 13kg
UP-AL08-12-25W	ø300x40	25	2000-2250	55x35x35 / 10PCS 13kg



Indoor Wall Light

MECHANICAL DATA

Humidity Range:	30-60%	
LED Brand:	Hongli 2835	
Operating Temperature:	-20°C ~ 50°C	
Housing Material:	Powder Coated with Steel Base	
Lens Material:	PC	
Housing Finish:	Silver/White	
IP Rating	IP42	
Mounting Configuration:	Surface	
Glare Rating:	UGR 22	
Flicker&DLC Specification:	SVM<0.4	DLC V4.0

ELECTRICAL DATA

		FEATURES
Driver:	Greenbo	EMC Applicable
Electrical Class:	Class 1	Triac Dimmable
Nominal Voltage Range:	100 - 277 VAC	DALI Control
Power Factor:	>0.95	1-10V Control
THD:	12%	Motion Sensor Integrated
Surge Protection:	Standard 1000V- Optional 2750V	Tridonic Optional
Battery Backup:	20% 30 - 90 Minutes	Vossloh Shwabe Optional
Photocell:	External	
Cable Entry:	Bottom	

Indoor Wall Light

EMERGENCY BACK-UP

Available for all models - Optional

Emergency function switches automatically between power cut and power restoration

Battery Duration: 3 Hours @ 4W

Smart IC Control, self-test starts after the luminaire is connected to mains for continued 24 hours



Li Battery, High Efficiency

Charge Period: 24 hours

EMERGENCY BACK-UP

DRIVER DATA	EMERGENCY	MAIN POWER
Input Voltage/Frequency	230VAC/50Hz	230VAC/50Hz
Efficiency	>70%	>88%
No load Wattage	-	<0.4W
Total load Wattage	4W±0.5W	18W
Power Factor	-	>0.9
Rated output current	100-170mA	230mA
Output current range	-	230mA±5%
Power Tolerance	-	±5%
Battery Duration/Charge Time	3h@4W/24h	-
Short Circuit/Over voltage/Over Temp.	-	Yes/Yes/Yes
Withstand Voltage	-	375VAC

PACKAGING

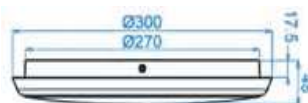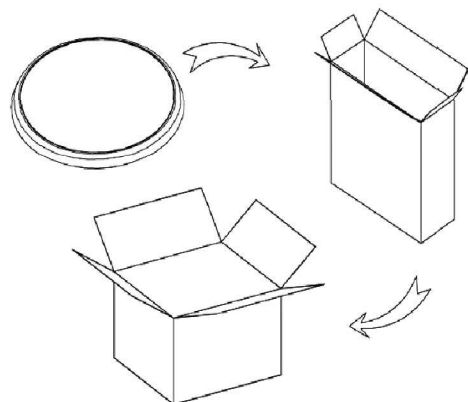

	SIZE(CM)	N.W/pc (KGS)	G.W.(KGS)	QTY(PCS)
Carton	61*32.5*33.5	1.15	12.5	10

	CTNS	QTY(PCS)	VOLUME(CBM)
20" standard container	410	4100	28
40" standard container	820	8200	56